
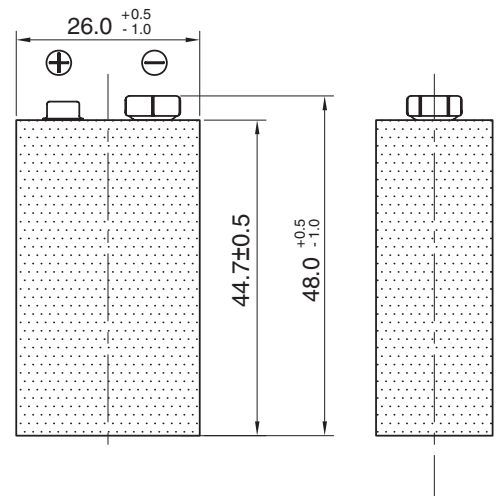


Model No.: **GPCR-V9**

Description	: Lithium Battery, 9V Size
Chemical System	: Lithium Manganese Dioxide
Nominal Voltage	: Volts
Nominal Capacity	: 800mAh @ 10mA to 5.4V at 23°C
Dimensions	: 26(L) x 16.5(W) x 48(H)mm
Terminals	: Standard snap fastener stud(+) and socket(-)
Shelf Life	: up to 10 years
Average Weight	: App. 34g
Application	: Smoke detectors, security devices, : medical equipment, carbon monoxide alarms, explosion gas alarms, meters (gas/electric/water), metal detectors, wireless transmitters, electronic toll collection system, etc.
Operating temperature	: -40°C to 60°C



Cross References:

ANSI	Ultralife
1604LC	U9VL



 Label Area


Unit : mm

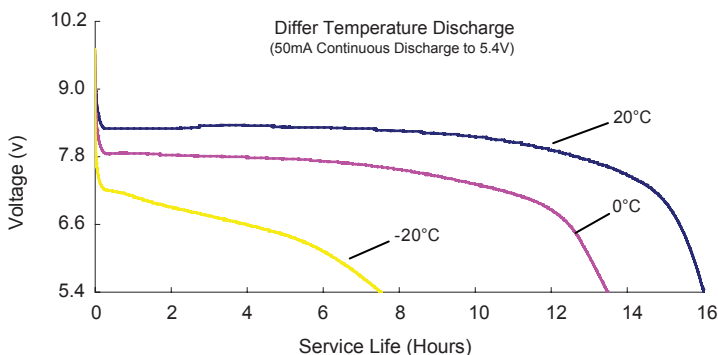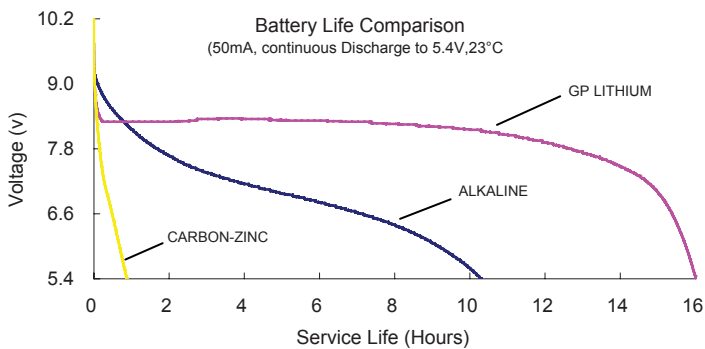

www.gpbatteries.com

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.

Manufacturer reserves the right to alter or amend the design, model and specification without prior notice.
Copyright© GPI International Ltd. - All rights reserved

 Member
Gold Peak Group

01140114005