


Product Datasheet

Alkaline

LR6 Pro Power



LR6PPG

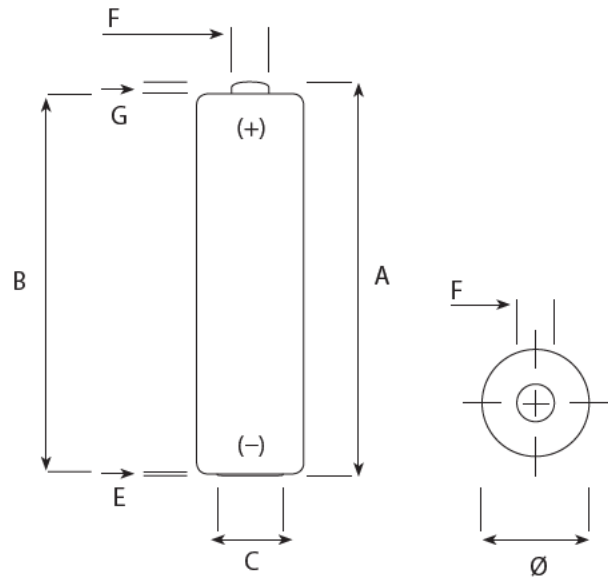

IEC Dimensions (mm)		
Dimension	Maximum	Minimum
A	50,5	
B		49,2
C		7,0
E	0,5	
F	5,5	
G		1,0
Ø	14,5	13,5

Name	LR6 / M / AA / AM3 / MIGNON / MN1500 / 15A / 15AC
Made in	Belgium
Type	Alkaline Foil
Nominal Voltage	1,5 Volt
Electrolyte	Potassium Hydroxide
Average weight	22,8 g
Storage temperature range	+10°C (50°F) ~ +25°C (77°F)
Operating temperature range	-20°C (-4°F) ~ +55°C (131°F)
Average Impedance	+/- 105 m-Ohm @ 1kHz fresh
Heavy metals	No added mercury (Hg), Cadmium (Cd) or Lead (Pb)
Compliant to	IEC 60086 non dangerous goods regulation EU directive 2006/66/EC
Recommended cut off voltage	0,8V per cell

For more information:


www.panasonic-batteries.com

Panasonic


Typical discharge values

LR6


Radio 4h/d 43 ohm end 0,9 volt

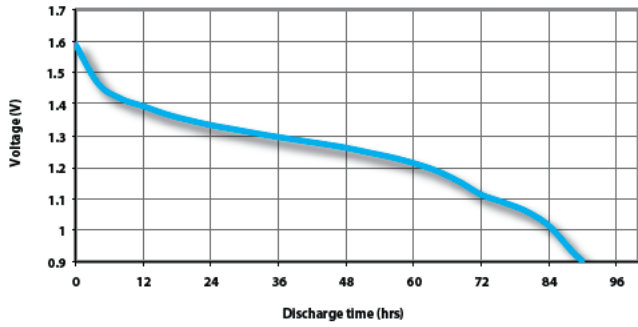

Tape 1h/d 100 mA end 0,9 volt

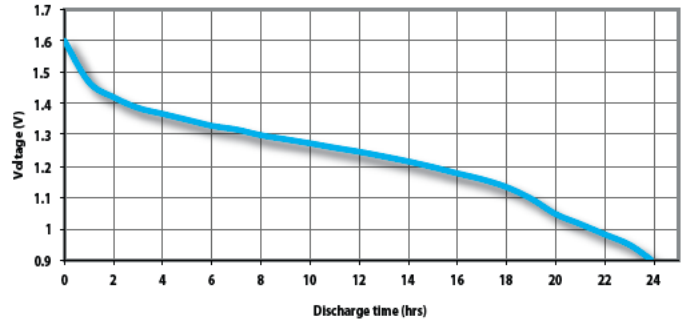

Motor 1h/d 3,9 ohm end 0,8 volt

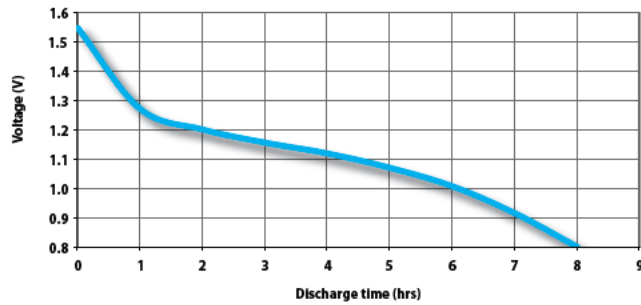

Remote Control 15s/m 8h/d 24 ohm end 1,0 volt



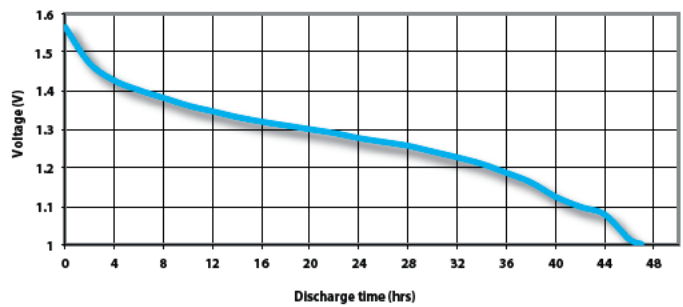



Photo flash 10s/m 1h/d 1000 mA end 0,9 volt

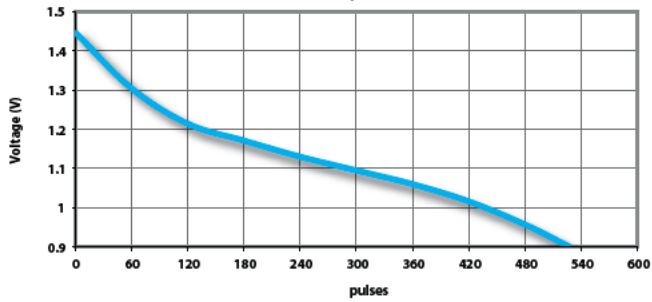

CDMD 1h/d 250 mA end 0,9 volt

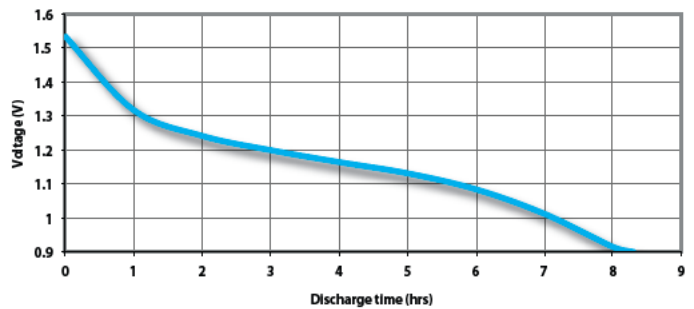

DSC 10x(2s 1,5W/28s 0,65W) 5m,55m off, 24h/d end 1,05 volt

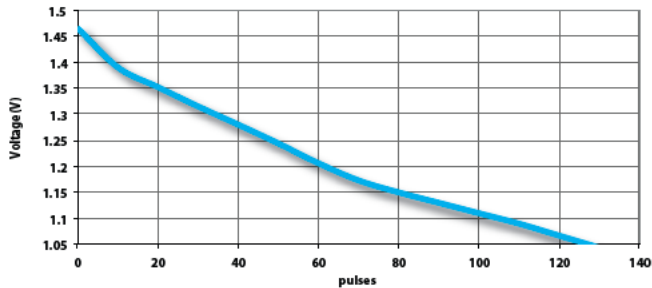

LIF 4m/h 8h/d 3,3 ohm end 0,9 volt

